


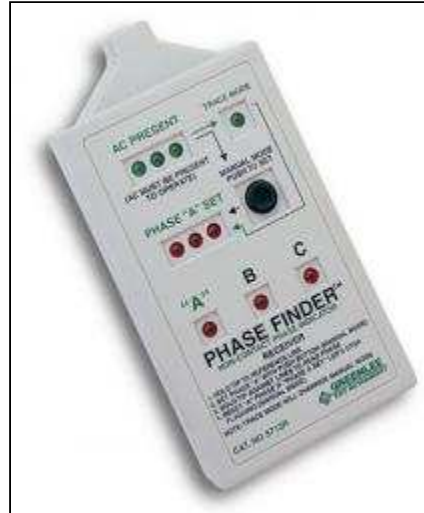

PRODUCT SEARCH

[> SUPP](#)  
[> DIST](#)
[HOME](#)[WHAT'S NEW](#)[SERVICE / SUPPORT](#)[WHERE TO BUY](#)[INSTRUCTION MANUALS](#)[CO](#)**INSTRUMENTS**[Hand Tools](#)[Holemaking](#)[Bending](#)[Fishing](#)[Cable Pulling](#)[Wire & Cable Termination](#)[Voice Data Video](#)[Testing & Measurement](#)[Storage & Material Handling](#)[Hydraulic Pumps & Miscellaneous](#)**Name:**

Noncontact Phase Sequence Indicator

**Cat #:**

5712

**UPC #:**

07575

**Spec:**

Frequency Required 50/60Hz Phase Lock Holds phase for 12 seconds from last indications. Overvoltage Protection IEC 61010-1, 600V CAT III

**Description:**

Noncontact detection of phase sequence.

- Self-adjusting to correct phase if line frequency varies.
- Auto shutoff for maximum battery life.
- Proximity sensor means safe, noncontact sequence.
- Accessories included: (1) 9V battery, case.
- 

**Instruction Manual(s):**